

# NMX-750, Power Factor Corrected Multiple Output, Forced Current Sharing



## SPECIFICATIONS:

### INPUT

**Ac Input:** 90-264 Vac continuous range, 47 to 63 Hz. Internally fused for 15 A.

**Power Factor:** 0.99 typical at full load. Meets EN61000-3-2 Class A.

**Inrush:** Cold start ac current is less than 65 A at 115 Vac and 130 A at 230 Vac. Limited by thermistor.

**Brownout Protection:** Holds regulation to 85 Vac.

**Holdup Time:** 20 ms minimum after removal of power at full load.

**Efficiency:** 75% typical.

**Ac Power Fail:** Provides TTL "0" 5 ms before output voltage goes out of regulation band upon loss of ac power.

### OUTPUT

**Adjustability:** Outputs #1 and 2 user adjustable  $\pm 5\%$  minimum. Output #3 tracks #2; initial accuracy  $\pm 4\%$ . Output #4 user adjustable  $\pm 5\%$  minimum, or +5% only if voltage is 5.2 V.

**Line & Load Reg:** Outputs #1, 2, and 4 hold  $\pm 1\%$  over ac input range and 0 to 100% load change. Output #3 requires 20% minimum load on outputs #2 and 3 to hold  $\pm 4\%$ .

**Ripple & Noise:** Less than 1% p-p or 100 mV, whichever is greater.

**Remote Sense (Outputs #1 and 2):** Compensates for 250 mV total line drop. Open sense lead protection. (See Redundancy.)

**Temperature Coefficient (Outputs #1, 2, and 4):** 0.02% per degree C.

**Stability:** 0.1% over 8 hours after 30 minutes warm-up.

**Transient Response (Outputs #1, 2, and 4):** Output voltage returns to within 1% in less than 500  $\mu$ s for a 50% load change. Peak transient does not exceed 5%.

**Overload Protection:** All outputs are protected against overload and short circuit. Automatic recovery upon removal of fault.

**Overvoltage Protection (Outputs #1 and 2):** Protects load against power supply induced over voltage. Trip point is factory set so that output voltage cannot exceed 136% of nominal.

**Peak Output Current:** Dual current ratings define continuous and peak currents. The peak current shown can be delivered for a maximum period of 30 seconds.

**Remote Inhibit:** Contact closure to the negative sense line or a TTL level "0" turns off dc outputs.

**Dc Power Good:** Provides a TTL "1" when output #1 is above 4.6 V nominal.

## FEATURES:

- Forced current sharing for N + 1 redundancy
- Remote sense on outputs #1 and 2
- Universal ac input
- 0.99 typical power factor
- Dual converter design eliminates interaction between logic and auxiliary outputs
- Low ripple and noise on all outputs
- Dc power good and ac power fail signals
- True remote inhibit
- Monotonic turn-on and turn-off

**Redundancy:** External OR-ing diodes and forced current sharing on output #1 provide "N+1" capability. Remote Sense (+S) compensates for additional 0.6 V diode voltage drop. When the current sharing terminal is connected between units, current sharing remains within 10% of the unit's full output current rating. Requires minimum load of 12.5 A on +5V.

## ENVIRONMENTAL

**Thermal Protection:** Shuts down power supply if overheated. Automatic recovery.

**Temperature Range:** 0° to 50° C at full ratings.

**Safety Agencies:** Most models are approved to UL1950; CSA 22.2 #234; IEC 950 and TÜV EN60950, Class 1 SELV., CE 72/23/EEC/93/68EEC (low voltage directive).

**Conducted RFI:** Meets FCC Part 15, Class A; EN55022 Class A.

**Output Isolation:** Isolated from ground 50 Vdc.

**Reverse Voltage:** Protected against reverse voltage up to supply current rating.

**Cooling:** Self cooled with internal ball-bearing fans.

## OPTIONS:

**Option "B", Barrier Strip:** Provides auxiliary output connections on #6-32 terminal screws with 3/8" centers.

## AC INPUT(90-264 VAC Continuous Range)

FUNCTION	115 VAC	230 VAC	CONNECTOR
TB1-(L)	Line	Line 1	Barrier strip
TB1-(N)	Neutral	Line 2	#6-32 screws, 3/8" centers
TB1-(GND)	Safety Ground	Safety Ground	

## DC OUTPUT

FUNCTION	LOCATION	NOTES	CONNECTOR
Output #1	Terminal marked +V	Main output	Bus bars
	Terminal marked -V	Rtn (common)	#1/4-20 screws
Output #2	J6-3, 11, 4, 12	Rtn (common)	AMP#770974-1 mates
	J6-5, 13, 6, 14, 7, 15		with connector 770583-1
Output #3	J6-8, 16	Rtn (common)	with sockets #171639-1
	J6-5, 13, 6, 14, 7, 15		(AWG #20 to #16)
Output #4	J6-1, 9	(+) Floating Output	
	J6-2, 10	(-) Floating Output	

## STATUS AND CONTROL


FUNCTION	LOCATION	NOTES	CONNECTOR
Remote Sense	J1-5	Output #1 Sense	AMP MTA type
	J1-4	Output #1 Sense Rtn	#640456-5 pin
DC Power Good	J1-3	Reference to common	header (locking)
	J1-2	when #1 Sense Rtn is	
Current Share	J1-1	Terminated	
Remote Sense	J3-1	Output #2 Sense	AMP MTA type
	J1-4	Output #2 Sense Rtn	#640456-4 pin
Ac Power Fail	J3-3	Reference to common	header (locking)

# NMX-750, Power Factor Corrected Multiple Output, Forced Current Sharing

Commercial Model	Power Out	Output No.	Output	Output Maximum	Total Regulation (A)
NMX-754-1205	750	1	+5 V	120 A	1%
		2	+12 V	12/20 A pk	1%
		3	-12 V	10 A	5%
		4	5.2 V	5 A	1%
NMX-754-1212	750	1	+5 V	120 A	1%
		2	+12 V	12/20 A pk	1%
		3	-12 V	10 A	5%
		4	12 V	5 A	1%
NMX-754-1224	750	1	+5 V	120 A	1%
		2	+12 V	12/20 A pk	1%
		3	-12 V	10 A	5%
		4	24 V	3 A	1%

Note: Output #3 requires 20% minimum load on outputs #2 and 3 to hold +/-4%.

## NMX-750 MECHANICAL SPECIFICATIONS:

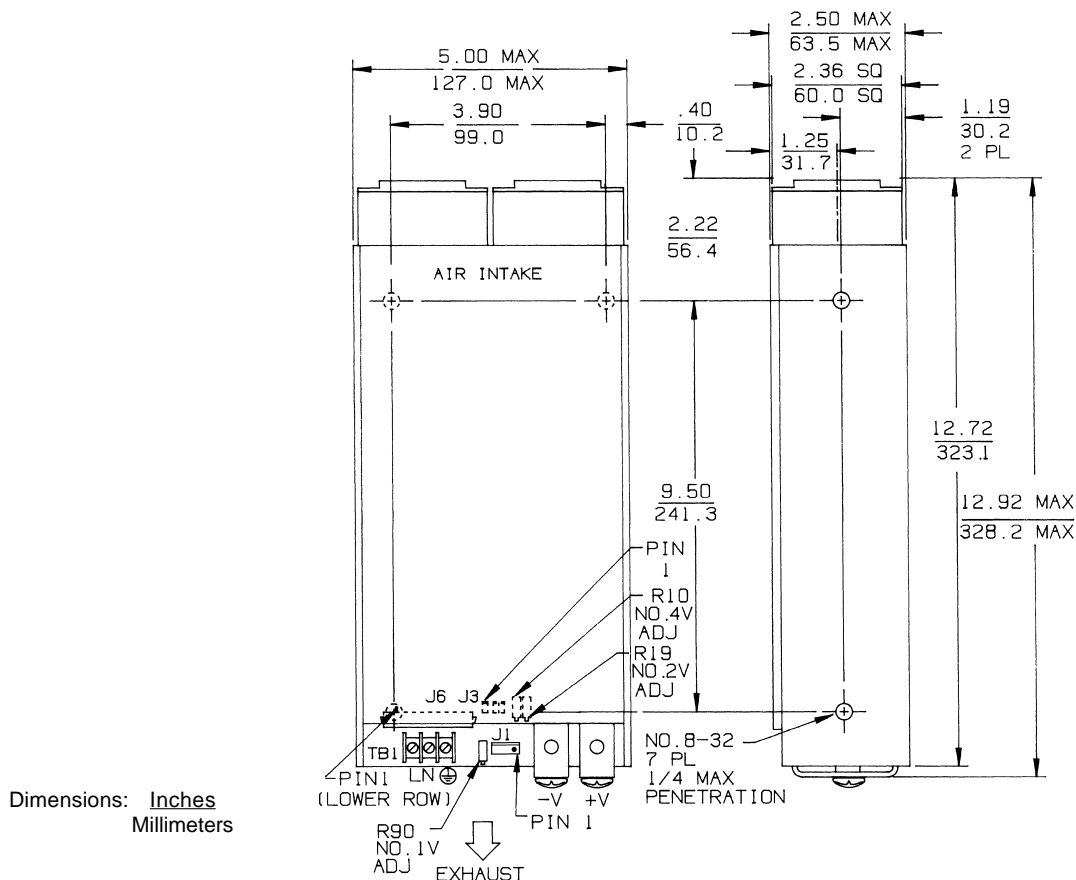

Condor D.C. Power Supplies, Inc., 2311 Statham Parkway, Oxnard, CA 93033  
800-235-5929 • 805-486-4565 • FAX 805-487-8911 • www.condorpower.com